




FUJIKURA COMPOSITES

Special CFRP pipe

Through appropriate material selection and test evaluation, we provide pipe members tailored to the customer's requirements.

•Example 1 Heat-resistant pipe

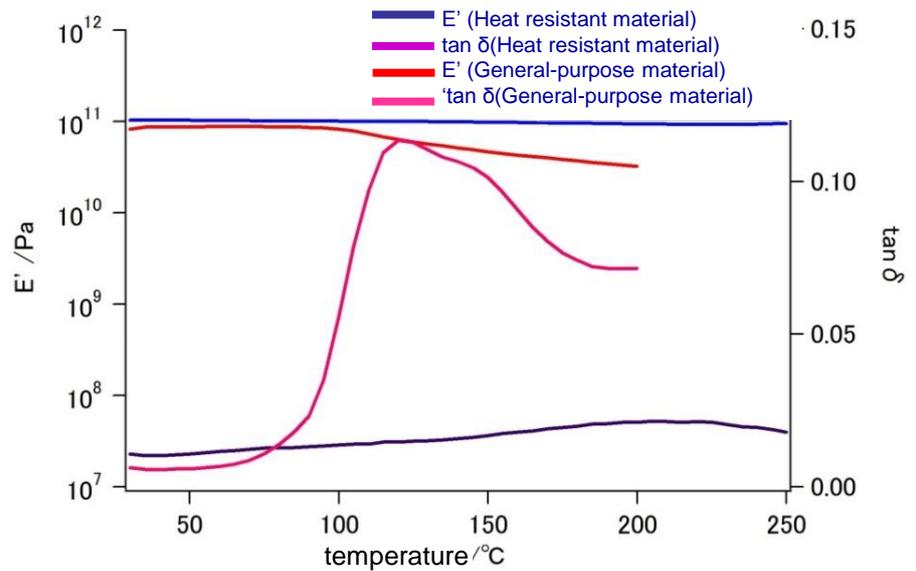

Comparison of heat-resistant materials and general-purpose materials

Condition: Three-point bending (1 Hz)

Test specimen: Unidirectional laminate thickness = 1 mm

Example 2 Flame retardant pipe



- Equivalent to UL94 V-0
- Non-halogen



* Evaluation result in our company

Evaluation method: 20 mm vertical combustion test

Test specimen: One-way laminate (150 × 13 × t1)

FUJIKURA COMPOSITES Inc.

6-12-8 Ueno, Iwatsuki-ku, Saitama-shi,

Saitama 339-8510, Japan

TEL +81-48-794-2940

E-mail kaihatsu@fc.fujikura.co.jp

RDTR07-0023 20140722