


▶ Dual purpose coating blanket for the application of UV and Aqueous Coating

▶ FP-75 OVERVIEW

Superior Coating Performance

Designed to give superior in-line coating performance with UV and Aqueous Coating. Consists of a special new surface rubber formulation to guarantee a smooth and even transfer of coating onto all substrates at high press speeds. Simple to cut and peel with good relief depth of 1mm.

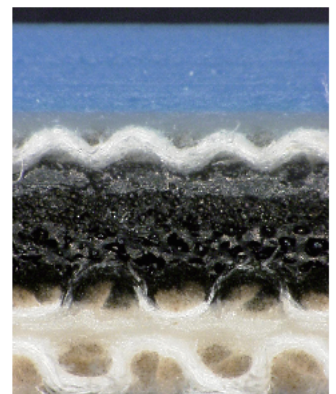

▶ PRODUCT FEATURES

- Smooth and even transfer of coating onto all substrates
- High Resistance to swelling caused by coatings and washes
- Outstanding flexibility for fast and simple mounting on the cylinder
- High endurance and dimensional stability

▶ TECHNICAL SPECS

Type	Coating
Nominal Thickness	1.96 mm
Color	Light Blue
Roughness	4.0 μm
Hardness	84 Shore A

